

HIGH-PERFORMANCE
COMPONENTS




FC SERIES ABOVE GROUND

FC30 - 120V | FC60 | FC75 | FC90

HIGHEST EFFICIENCIES
IN THE INDUSTRY

FC30 – NIRVANA HAS THE ONLY AHRI-CERTIFIED
120V UNIT PLUG-IN ON THE MARKET



Best Warranty



Quiet



Wi-Fi



Energy
efficient




FC SERIES

MODEL FC SERIES		FC30	FC60	FC75	FC90
80/80/80 – AHRI ¹	BTU / COP	27 000 / 6.0	56 000 / 7.0	71 000 / 6.8	84 000 / 6.8
80/63/80 – AHRI ¹	BTU / COP	26 000 / 5.8	53 000 / 6.8	67 000 / 6.5	80 000 / 6.5
50/63/80 – AHRI ¹	BTU / COP	18 000 / 4.0	37 000 / 4.6	46 000 / 4.5	55 000 / 4.6
REFRIGERANT		R410A			
MINIMUM / MAXIMUM BREAKER (A)		20	20/30	30/30	30/40
AMPS (A)		11.7	10.3	13.3	15.5
DECIBELS AT 10 METERS		44	42	42	42
VENTILATION		26" SINGLE SPEED FAN			
HEAT EXCHANGER		TWISTED TITANIUM DOUBLE COIL			
DEFROST		PASSIVE (37°F)			
CONTROL BOARD		4 LINES X 20 CHARACTERS LCD DISPLAY WITH TOUCH BUTTONS			
COMPRESSOR TYPE		ROTARY	SCROLL		
VOLTAGE		120V - 20AMP PLUG IN	240V / 60HZ / 1 PHASE		
CABINET		FIBERGLASS-REINFORCED, INJECTION-MOLDED POLYPROPYLENE COMPOSITE			
MINIMUM / MAXIMUM WATER FLOW (GPM)		15-65	20-80	26-80	32-80
DIMENSIONS IN INCHES (W x L x H)		39 X 37 X 30	39 X 37 X 30	39 X 37 X 34	39 X 37 X 34
WEIGHT (LBS)		150	191	222	240
WATER CONNECTION		2" QUICK-CONNECT FITTINGS (INCLUDED)			
POOL DIMENSIONS (UP TO)	ABOVE GROUND	23'-15'-18'	15'-18'-21'	21'-24'	24'-27'
	GALLONS	UP TO 8000	UP TO 12000	UP TO 18000	UP TO 20000



¹ Certified according to AHRI 1160: Ambient temperature (°F) / Relative humidity (%) / At the water temperature (°F). With a water flow rate of 0.45 GPM per 1,000 BTU at the 80/63/80. Pool dimensions listed for reference only. Results may vary based on region, ambient air temperature, and use of a solar blanket.

COMPARATIVE HEATING COSTS

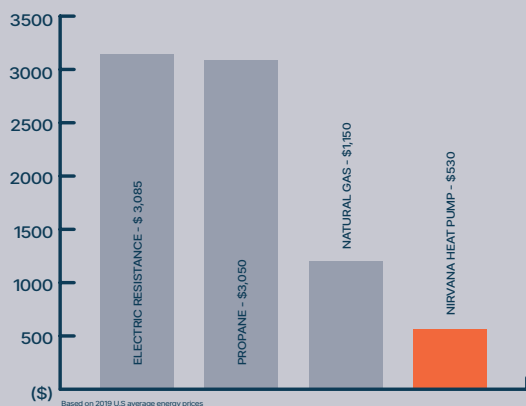

NIRVANA heat pumps are engineered to deliver the best performance and build quality in their categories. **MORE PERFORMANCE = LESS COST** — day after day, year after year — keeping your pool warm and enjoyable throughout the entire season. **NIRVANA** offers the **highest-performing units according to AHRI for low-temperature efficiency**, which translates into some of the **lowest total cost of ownership in the industry**.

For more information, visit www.ahrinet.org
The **Coefficient of Performance (COP)** measures how effectively a heat pump transfers heat from the air into the pool water. Higher COP values result in lower operating costs. **AHRI certification** ensures that the unit's performance has been independently tested and validated.

NIRVANA WARRANTIES

COMPONENTS	COVERAGE
LABOR (FC60, FC75 AND FC90)	3 YEARS
PARTS (FC60, FC75 AND FC90)	10 YEARS
LABOR (FC30)	2 YEARS
PARTS (FC30)	2 YEARS (5 YEARS FOR TITANIUM TUBE PART OF HEAT EXCHANGER)

BEST WARRANTY