NIRVANA

NIRVANAHP.COM

SPV VARIABLE SPEED PUMP

HIGH-EFFICIENCY MOTOR
SIMPLE INSTALLATION. HIGH PERFORMANCE.

- EASY AND HASSLE-FREE INSTALLATION (ONE TOUCH CONTROLLER)
- ADVANCED QUIET-OPERATION SYSTEM
- 120V/240V COMPATIBLE PLUG-IN CABLE

Warranty - Canada
3 years - Parts & Labor

Wi-Fi + RS485




INTERTEK ETL LISTED C US

WITH ITS HIGH-PERFORMANCE MOTOR OFFERING UP TO 86% EFFICIENCY, THE SPV DELIVERS A POWERFUL, EFFICIENT, AND EASY-TO-INSTALL SOLUTION FOR RESIDENTIAL POOLS AND SPAS.


FEATURES

- **Powerful Self-Priming up to 3.5m Above Water**
- **Universal Fittings Compatible with Imperial and Metric Standards**
- **IPX5 Waterproof Standard**
- **Basket Volume: 2L**

SMART AND USER-FRIENDLY CONTROL PANEL

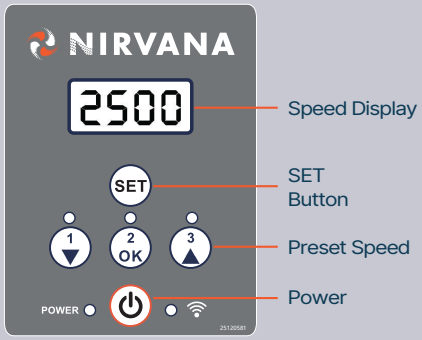


MODBUS / R485 CONNECTIVITY

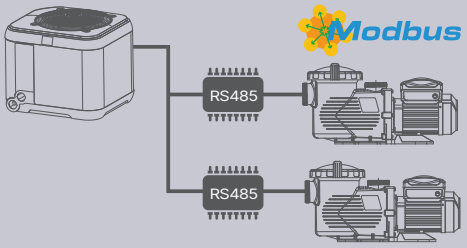


EPV or SPV Pump

PRODUCT DIMENSIONS

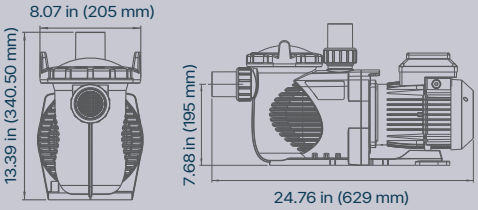


TECHNICAL INFORMATION

Model: SPV 125

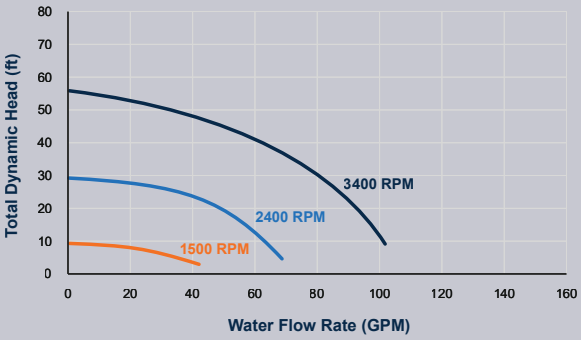

Model: SPV 165

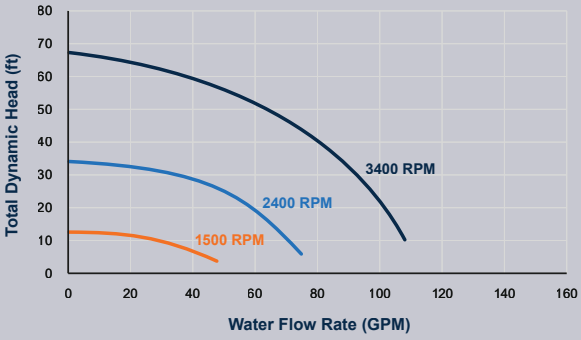

SPECIFICATIONS	SPV125	SPV165
ELECTRICAL SUPPLY	120-240V / 60 Hz / 1 Phase	
MOTOR POWER	1.25 hp	1.65 hp
SPEED RANGE (RPM)	800 - 3400	
MAX. INPUT POWER (kW)	1.10 kW	1.50 kW
REQUIRED BREAKER (A)	15 A	
AVERAGE OPERATING AMPERAGE (A)	4.0 A at 120V 2.0 A at 240V	5.7 A at 120V 2.85 A at 240V
DECIBELS (DB)	36	
MIN. / MAX. WATER FLOW (GPM)	22 - 119 GPM	27 - 132 GPM
CONTROLLER	Digital controller with digital display	
MODBUS / RS485 COMPATIBILITY	Yes	
HOUSING	Fiberglass-reinforced ABS with critical components in 316 stainless steel	
STRAINER BASKET VOLUME (L)	2 L	
DIMENSIONS IN INCHES (L x W x H)	24.76 x 8.07 x 13.39	
WEIGHT (lb)	39.68	
CONNECTION	1.5'' / 2" (INCLUDED)	

© 2026 NirvanaHP. All rights reserved.