



NIRVANA

NIRVANAHP.COM

SINGLE-ELEMENT CARTRIDGE FILTER

**DELIVERS CRYSTAL-CLEAR,
SPARKLING WATER**

It is made from high-strength, UV-resistant materials for long-lasting performance. Its compact, low-profile design fits easily with any type of pool, even in tight installation spaces. With its high debris-retention capacity, it delivers highly efficient filtration, making it a reliable choice for crystal-clear, sparkling water.



Warranty - 2 years

EASY TO MAINTAIN

- Locking ring with a quick-release latch for fast removal and installation of the tank lid
- Large water-drain opening for faster and easier winterizing
- Filter element can be easily cleaned and rinsed with a garden hose

EASY TO USE

- 4 anchoring points.
- Easy-grip lid handle.
- Indicator gauge showing when maintenance is required.
- Knee-height tank base for easier cartridge replacement

ECO-FRIENDLY AND DURABLE

The large, single-piece filter element (up to 15 microns) offers a vast filtration surface, capable of capturing more debris. Unlike sand filters, it requires no backwashing, saving both water and chemicals.



PRODUCT FEATURES



LARGE DRAIN PORT




SMART PRESSURE GAUGE



QUICK-RELEASE RING



AIR RELEASE VAVLE

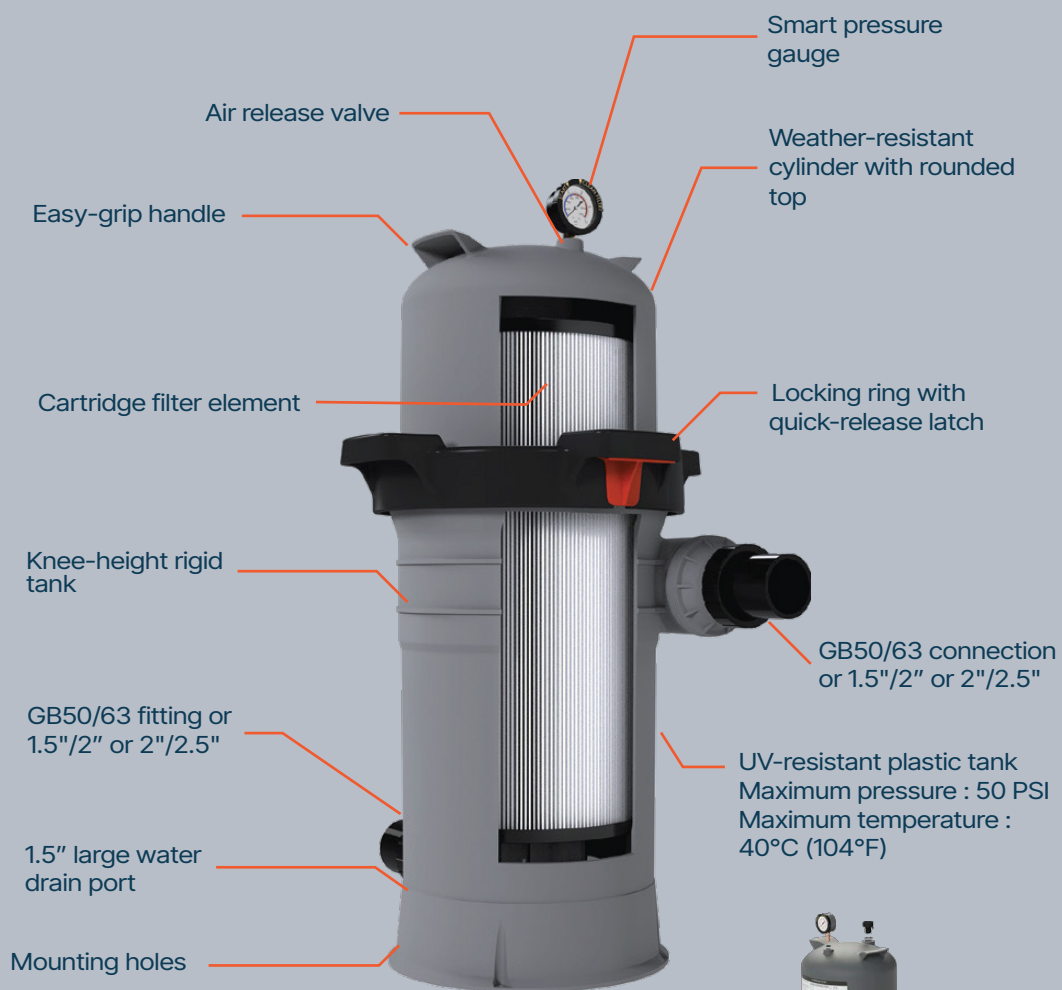

PRODUCT INFORMATION

Model	Filtration Surface	Flow velocity	Maximum flow rate	Inlet / Outlet connection		A	B	C	D	E	F
	ft ²	GMP/ft ²	GPM	GB(mm)	ANSI	mm/in	mm/in	mm/in	mm/in	mm/in	mm/in
ICF150	150	0.8	120	GB50 GB63	1.5"/2" 2"/2.5"	825 32.48	444.50 17.50	588 23.15	304 11.97	335 13.19	91 3.58
ICF200	200	0.6	120	GB50 GB63	1.5"/2" 2"/2.5"	1033 40.67	444.50 17.50	588 23.15	304 11.97	335 13.19	91 3.58

NOTE: ACCORDING TO INDUSTRY STANDARDS


1. The maximum flow rate for residential pools is 1 GPM/ft², with a maximum flow of 120 GPM. For public pools, the maximum flow rate is 0.375 GPM/ft², with a maximum flow of 150 GPM.
2. Determined by the pump size and system hydraulics; 2" piping is recommended for flows equal to or greater than 90 GPM (341 LPM).

CARTRIDGE FILTER ELEMENT INFORMATION

Model	G mm/in	H mm/in	Microns (µm)	Pleat count
ICF150-CE	590 23.23	267 10.51	15	172
ICF200-CE	717 28.23	267 10.51	15	187

THE NIRVANA SERIES FILTER IS EQUIPPED WITH :

- ✓ Energy savings
- ✓ Intuitive controller

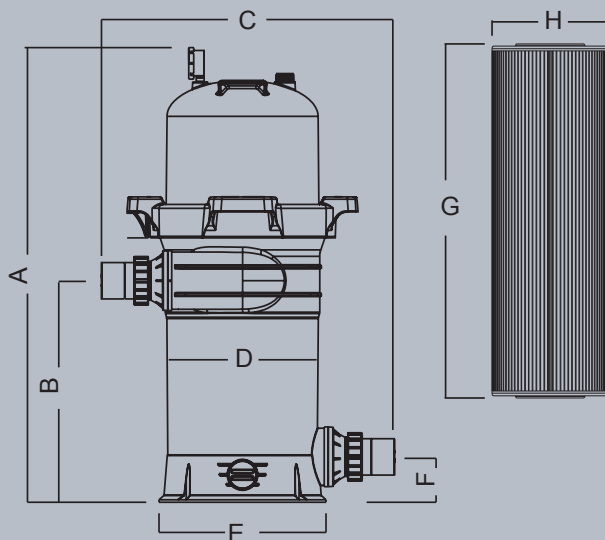



NIRVANA

NIRVANAHP.COM

NIRVANA

4215 Saint-Joseph Street
Trois-Rivières (QC) G8Z 4G3
819 519-8970