



NIRVANA

NIRVANAHP.COM

VOLUMETRIC FILTER

ULTIMATE FILTRATION PERFORMANCE

Monoblock filter designed for maximum durability. Suitable for all types of pools, including salt electrolysis, ozone, UV, or chemical dosing systems. Engineered to deliver unmatched water purity, it stands out compared to market standards and ensures efficiency, reliability, and ease of use.



Warranty - Canada

5 years - Tank
2 years - Parts



Water quality improved by 30%.



Easy to install, maintain, and replace.



Significant reduction in backwashing.



Highly compatible with all types of applications



Provides a return on investment



TANK MATERIALS
HDPE

MAXIMUM OPERATING PRESSURE
58 PSI / 4 BAR

MAXIMUM TEMPERATURE
50 °C (122 °F)


RECOMMENDED MEDIA SIZE
0.5 – 0.8 mm

PRODUCT DIMENSIONS

Model	A mm / in	B mm / in	C mm / in
T500	1040 / 40.94	508 / 20	400 / 15.75
T600B	1142 / 40.96	610 / 24.02	457 / 17.99

TECHNICAL INFORMATION

Model	Filtration Area		Connection Fittings	Maximum Flow Rate	Sand	
	(m ²)	(ft ²)			(kg)	(lbs)
T500	0.20	2.15	1.5" / 50 mm	10.0 m ³ /h or 353.147 ft ³ /h	95	200
T600B	0.29	3.12	2.0" / 63 mm	14.6 m ³ /h or 515.59 ft ³ /h	165	350

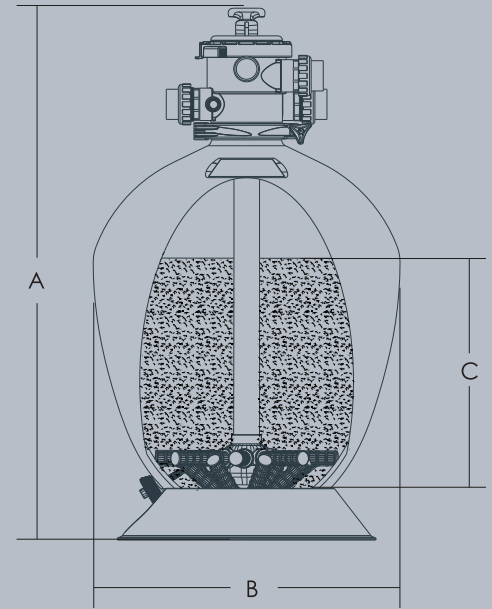

EXPERTLY DESIGNED TO DELIVER PURER WATER

6-Way Valve

Innovative design for easy maintenance, no tools required.

Filtration layer

A filter bed that is 30% taller allows for deeper water filtration, resulting in improved water quality.

Drain Valve

Robust and reliable, it helps reduce operating and maintenance costs.

Easy-to-use clamp

The hinged clamp allows the valve to rotate 360°, making installation and plumbing work easier.

Filter Tank

An innovative T-shaped filter tank is designed to improve backwashing. The HDPE tank can withstand higher water pressure and temperature (58 PSI / 122 °F).

Double-layer lateral system

It ensures uniform collection of filtered water and allows for complete backwashing of the filter media.



NIRVANA

4215 Saint-Joseph Street
Trois-Rivières (QC) G8Z 4G3
819 519-8970